

DuroForm Hexa +

EN 314 Part 2 Class 3

FSC Certified


370gm Hexa pattern

Special Eucalyptus

Construction

EN 636 - 3

Available from stock in 9mm, 12mm and 18mm, our DuroForm Hexa + panel is an excellent alternative to traditional Birch plywood phenolic overlaid plywood options. With its multi-lamination core construction and Dynea overlay, users of the material can expect a high end finish on this product that's been manufactured with the UK market in mind

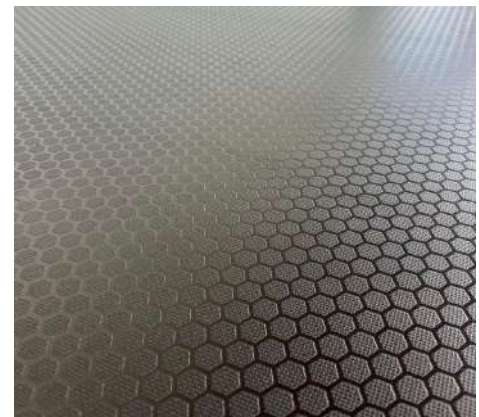

Overlay	370gm Dynea overlay with grey painted edges and a smooth Dynea reverse 185gm
Thickne	9mm,12mm & 18mm from stock - other thicknesses available on a forward basis
Dimenion	2440mm x 1220mm
Core	Eucalyptus throughout special construction 9mm = 7 ply 12mm = 9 ply 18mm = 13 ply
Properties	Special construction offers improved strength and stability
Performance	Manufactured with a phenolic glue bond throughout, achieving EN 314 Part 2 Class 3 and EN 636 3 end use class ratings
Application	Commercial vehicle, van and trailer flooring, arena seating and steps, access and loading platforms, walkways and ramps, marquee flooring and other interior /exterior applications (once suitably protected)