


Koala Phenolic Coated Plywood



FSC® (FSC-C007658) certified slip-resistant Eucalyptus plywood

Koala phenolic coated plywood is a tough, smooth-faced, slip-resistant and sustainable panel that's easy to work with, CNC machinable, and highly resistant to chemicals and weather ideal for a wide range of applications.

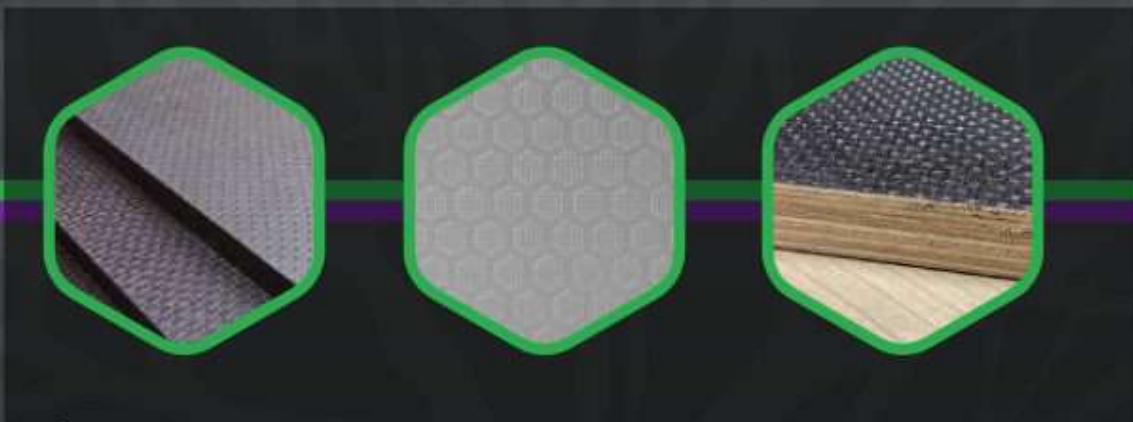

Specifications and uses

Face	240g phenolic film
Reverse	170g phenolic film, colour-matched with face
Core	Eucalyptus throughout, Glue Class 3 EN314 STRUCTURAL, Exterior Conditions, EN636-3S, E1, CE2+, EN13986 Edges Painted
Finish	Slip-resistant Hexa or Mesh pattern. Also available smooth finish 2 sides
Colours	Dark Brown, Black, Grey
Slip resistance	Hex (DIN 51130:2014-02): R12 / Mesh (DIN 16165:2021-12 am B): R13
Thicknesses	9mm / 12mm / 15mm / 18mm
Sizes	1220 x 2440 / 1220 x 2500 / 1250 x 2500 / 1525 x 3050 mm
Environmental information	FSC Mix 70% INT COC 002322
Country of origin	China
Typical applications	Internal vehicle flooring Temporary walkways and ramps Joinery, shopfitting and construction Agricultural applications Temporary exhibition, event and marquee flooring

Benefits

Easily
worked

CNC
machinable

Tough
& durable

Versatile
material

Note: Eucalyptus plywood has a lower strength value than birch plywood, which can also be supplied with a phenolic slip-resistant finish. Please check the suitability of this product for applications where structural strength is critical.